ACTUATOR: M15FB SL039

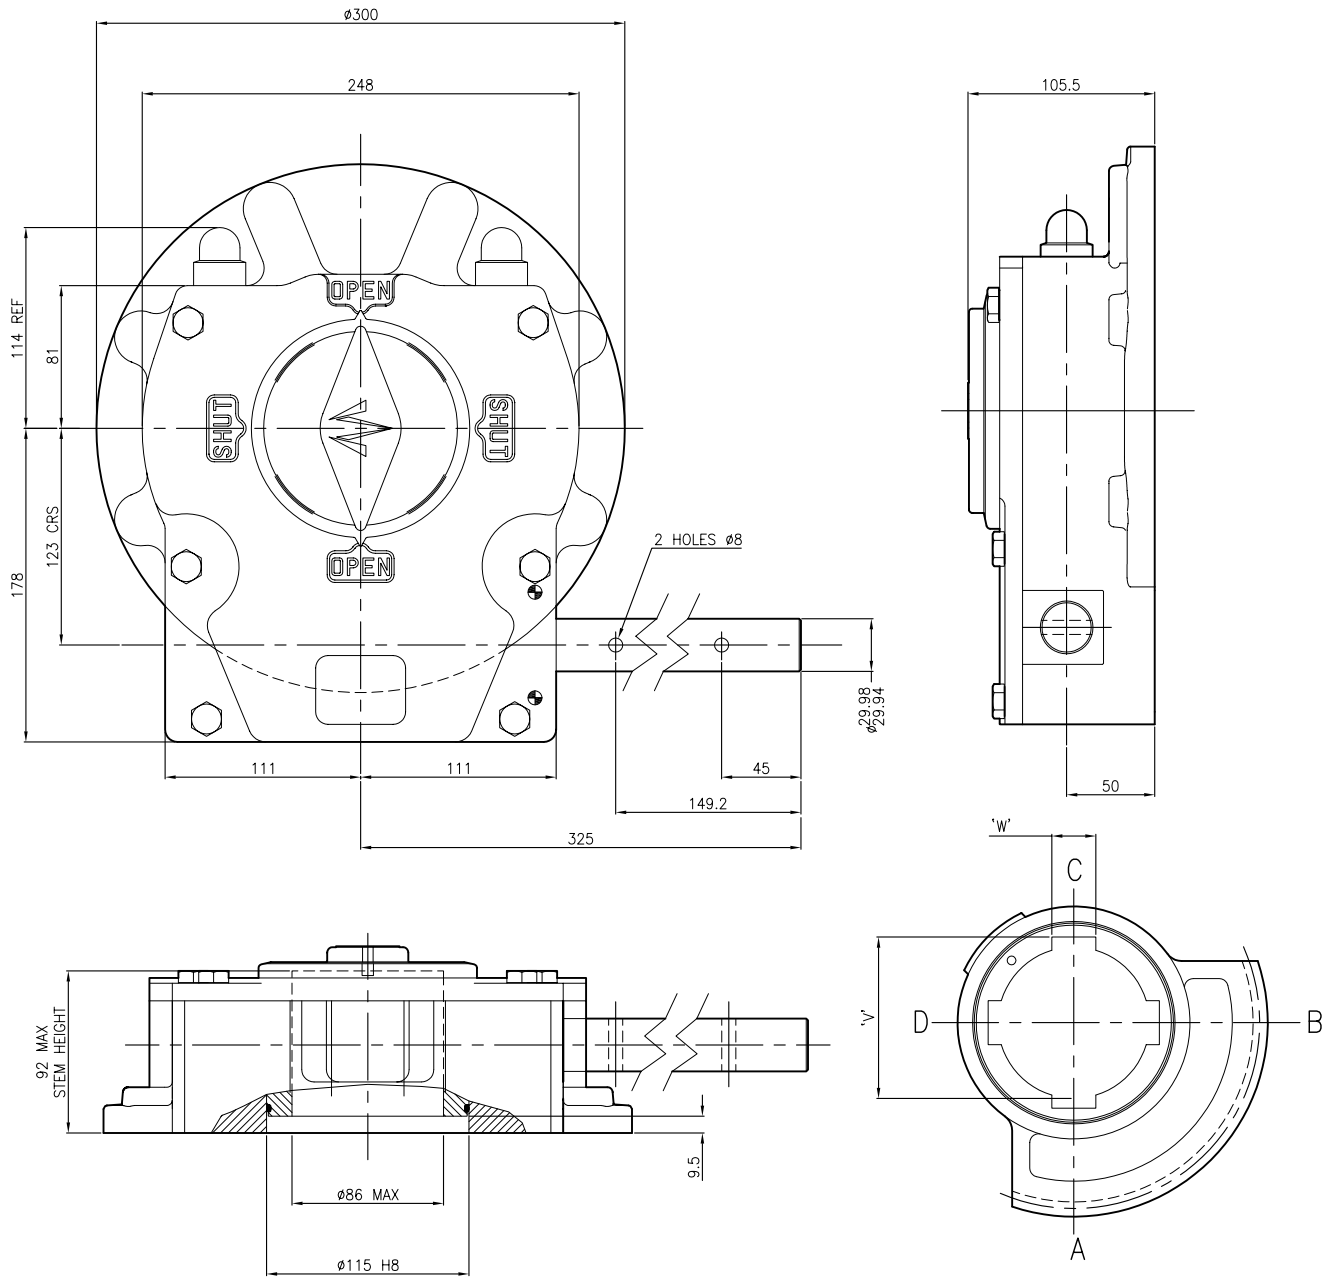

GENERAL INFORMATION

TRAVEL ..... 90° ±5° AT BOTH ENDS
RATIO 68:1
TURNS TO CLOSE 17
MECHANICAL ADVANTAGE ... 20.5 ±10%

OUTPUT KEYWAY DETAILS SHOWN IN OPEN POSITION

MAXIMUM OUTPUT TORQUE (1000 CYCLES)..... 4100 Nm
MAXIMUM OUTPUT TORQUE (5000 CYCLES)..... 3400 Nm
MAXIMUM INPUT TORQUE (1000 CYCLES)..... 200 Nm
MAXIMUM INPUT TORQUE (5000 CYCLES)..... 166 Nm

PREFERRED MOUNTING HOLE DETAIL (BSENISO 5211:2001)
F25 (8 x M16 on 254 PCD)

APPROXIMATE WEIGHT ..... 30 kg

OPPERMAN MASTERGEAR
Hambridge Road, Newbury, Berkshire, RG14 5TS. ENGLAND
Tel: 01635 811500 Fax: 01635 811501 E-Mail: sales@opperman-mastergear.co.uk

To BS308

DIMENSIONS IN MM [INCHES]

DATE	10Feb05
DRAWN	BJH
CHECKED	PAB
SCALE	1:4

This drawing/design is the property of OPPERMAN MASTERGEAR Ltd. © and must not be used or copied without their specific written consent. Specifications may change without prior notification

DRG No. ME-15383

REV. A