


ACTUATOR: M16 SUBSEA (CLASS 1 & 2) SL150

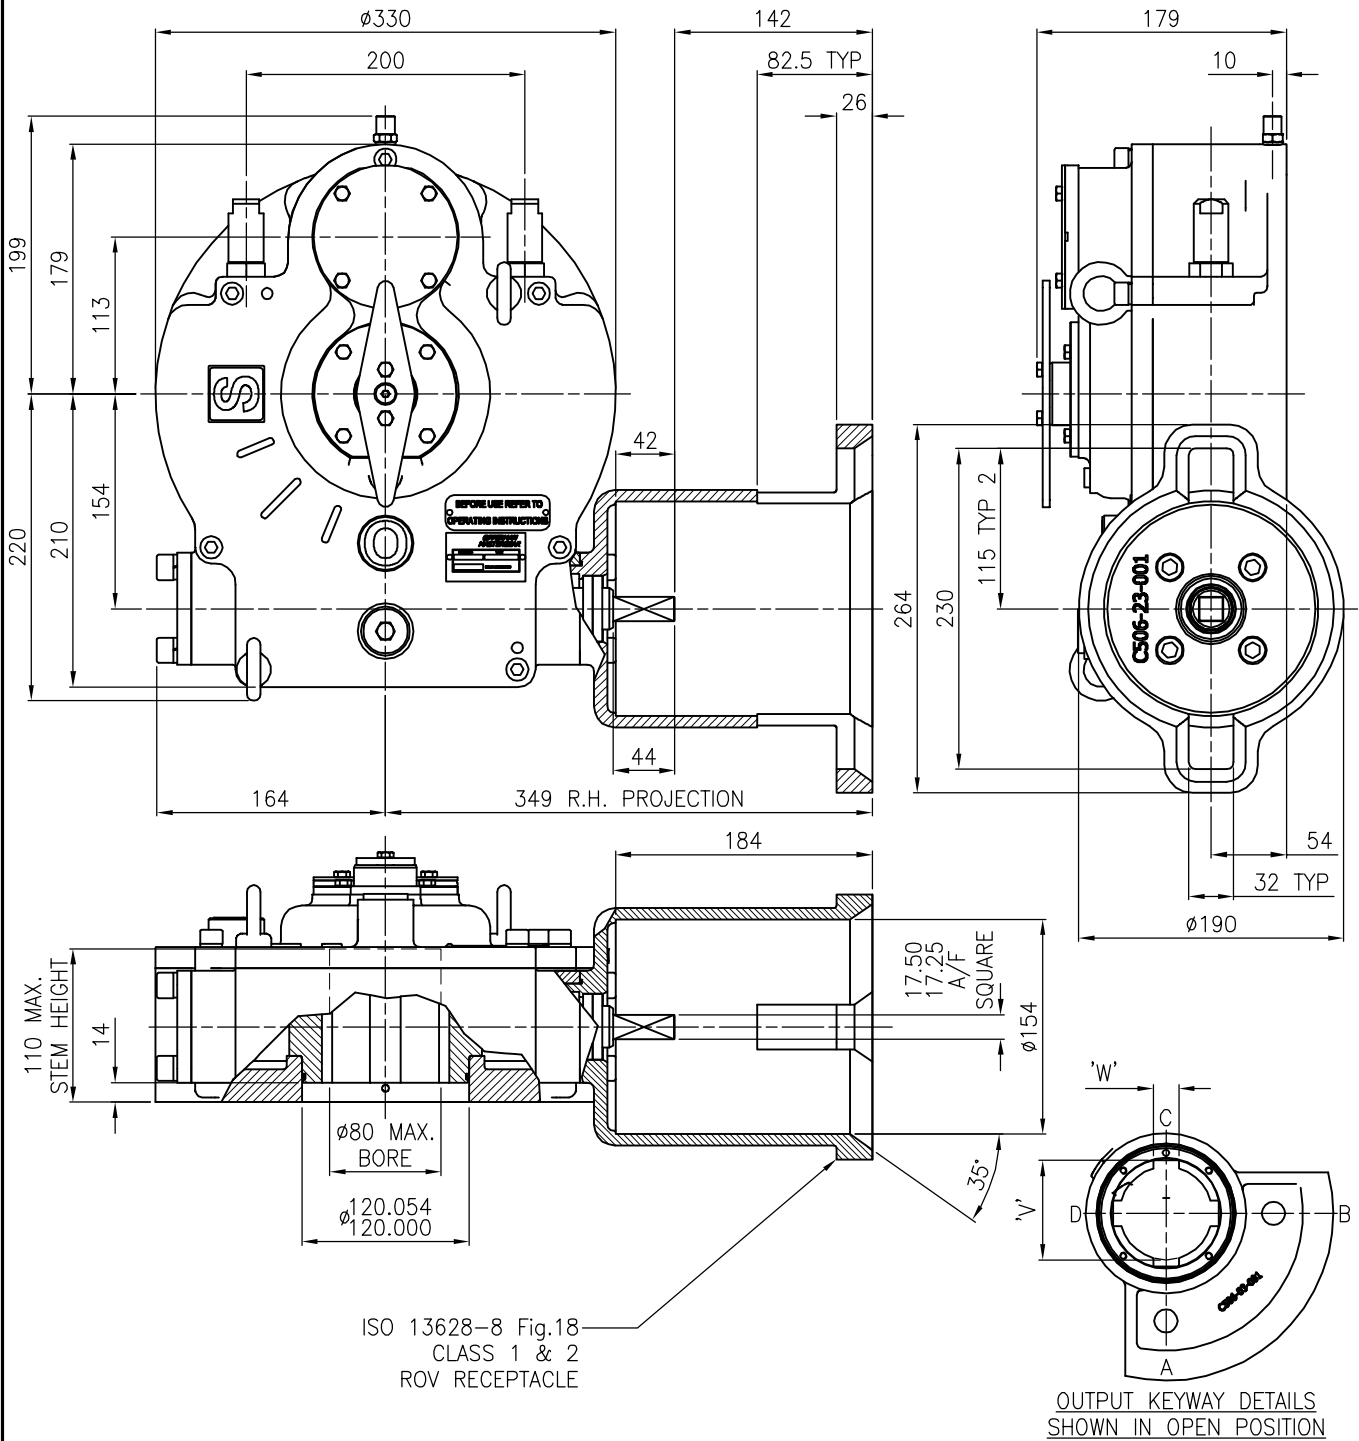

TRAVEL	90° ±5° AT BOTH ENDS	MECHANICAL ADVANTAGE	28.4 ± 10%
RATIO	88:1	MAXIMUM OUTPUT TORQUE(1000 Cycles) ...	5400 Nm
TURNS TO CLOSE	22	MAXIMUM INPUT TORQUE	190 Nm


MOUNTING HOLE DETAIL (ISO 5211)

PREFERRED	F25 (8 x M16 ON 254 PCD)	APPROXIMATE WEIGHT	68.5 kg
MAXIMUM	F30 (8 x M20 ON 298 PCD)		
MINIMUM	F16 (4 x M20 ON 165 PCD)		



OPPERMAN MASTERGEAR

Hambridge Lane, Newbury, Berkshire, RG14 5TS. ENGLAND
Tel: 01635 811500 Fax: 01635 811501 E-Mail: sales@opperman-mastergear.co.uk



DIMENSIONS
IN
MM [INCHES]

DATE	19Aug08
DRAWN	PAB
CHECKED	
SCALE	1:5

This drawing/design is the property of OPPERMAN MASTERGEAR Ltd. © and must not be used or copied without their specific written consent. Specifications may change without prior notification

DRG No. ME-16160-2

REV. A